

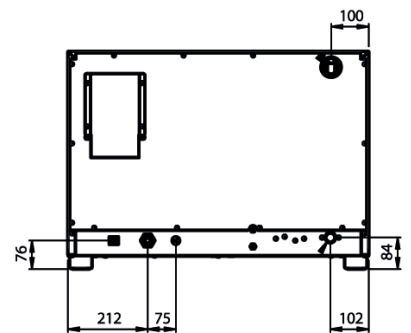


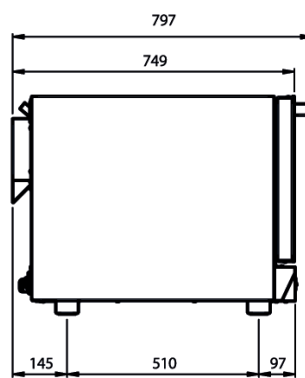

DT04LH

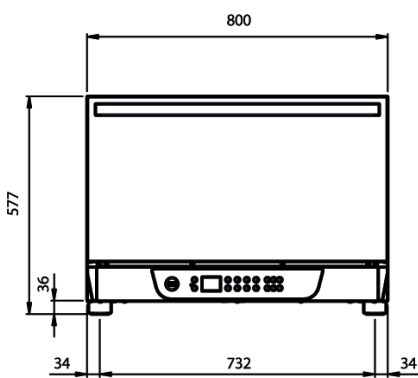

FUNCTIONAL CHARACTERISTICS

Display	DIGITAL WITH 2.4" DISPLAY
Supply	ELECTRIC
Timer	-
Number of motors	2
Motor speeds	2
Max cooking temperature (°C)	260°C
Core probe	Single point PT1000
Cooking chamber material	AISI 430
Opening door	From TOP to BOTTOM

STANDARDS

Certification	CB
---------------	----

TRAYS

Trays rack	Wire PA-BIV 4/80 Wite PA 4/80 (optional)
Max tray load	4 kg

DIMENSIONS

Oven size with handle WxDxH (mm)	800 X 797 X 577
Oven size without handle WxDxH (mm)	800 X 749 X 577
Chamber size WxDxH (mm)	600 X 456 X 345
Unit weight (Kg)	58,6

PACKAGING

Packaging	PALLET + CARTON BOX
Packaging size WxDxH (mm)	850 X 855 X 697
Unit weight with packaging (Kg)	70,2
Crate packaging size (optional)	-

ELECTRICAL DATA

Heaters 3.1kW 50Hz

Power	6,7kW
Frequency	50Hz
Power supply	380-415V 3N~/220-240V 3~/220-240V ~
Amperage	13,5A / 23,4A / 29,1A
Power cord req.	5G1,5/ 4G4/3G4

Heaters 3.1kW 60Hz	
Power	7kW
Frequency	60Hz
Power supply	380-415V 3N~/220-240V 3~
Amperage	13,5A / 23,4A / 30,4A
Power cord req.	5G1,5/ 4G4/3G6

WATER CONNECTION REQUIREMENTS

Humidification Water inlet	3/4" GAS
Washing Water inlet	8mm quick fitting
Water drain	-
Max water hardness	5°f
Water pressure requirement min-max	150-200 kPa

CONSUMPTION

Humidification Water	2l/h max consumption
Rinse Water @2barG	-
Short Washing Water @2barG	-
Long Washing Water @2barG	-
Short Washing Detergent *	-
Long Washing Detergent *	-

CONNECTIVITY

USB	2.0
Bluetooth	-
Wi-Fi	STANDARD
Cloud	STANDARD

ACCESSORIES

Self clean system kit	-
Oven stand	TA8058H60X - TA8058H60S TA8058H80X - TA8058H80S
Wheels kit for stand	R60B
Hood (Air)	-
Hood (Water)	POSSMWF1 POSSMWF2
Core probe	-

Proofer	CA9308M0 CA9308MH CA9308DH
Stacking kit for 2 ovens	SK3
Smoker	SMK02
Blast chiller	ASP05
Blast chiller stacking kit	-
Water softner cover	WS10
Water softner 6800L	WS11
Water softner 12000L	WS12
Water pressure adapter	WPA
Water shower kit	-
Detergent 6KG (only with self clean system)	-
Detergent 10KG (only with self clean system)	-