



- Highly effective patented cooling system.
- Sturdy and light weight fiberglass ABS body.
- Ergonomic handle.
- Rubber buffer between motor and shaft.
- High efficiency motors.
- 3 controls available:
 - one speed
 - drill like speed control
 - Variotronic: speed control with stabilizer
- Safety device preventing switching on by mistake.
- Trigger switch for continuous blending.
- 3 different motors.
- IPX3 protection.
- Quick coupling device.
- Shafts available in 2 length: 35 and 45 cm.
- Completely demountable shafts for an accurate cleaning and a longer life.
- Completely stainless steel shaft and bell.
- Optional:
 - storage case
 - pot support
 - wall attachment
 - exposition shelf
 - whisk
- Whisk metal gearings.
- Demountable and dishwashing safe whisk.

DETAILS



Removable knives and shaft




Shafts and Whisk



Vortex container

TECHNICAL DATA

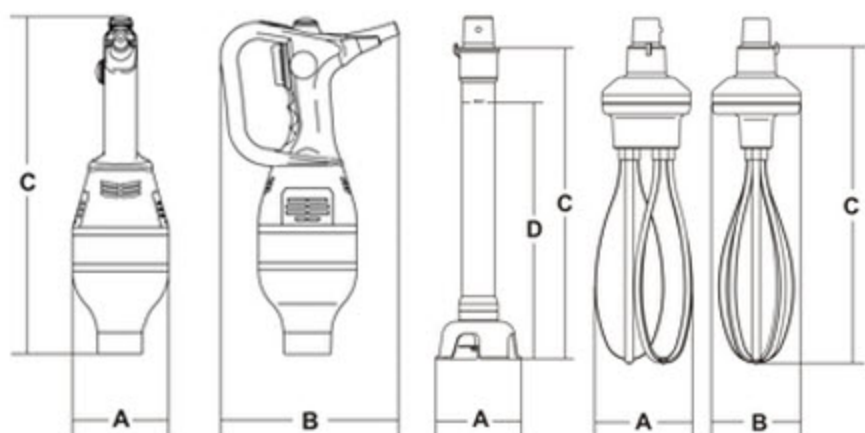

| Model | Vortex 55 | Vortex 55 VV | Vortex 55 VT | Asta 35 | Asta 45 | Fru |
|--------------------|---------------------|---------------------|------------------------|----------------|----------------|-----|
| Power | watt 550 Hp 0,80 | watt 550 Hp 0,80 | watt 550 Hp 0,80 | - | - | - |
| Power source | 230V/50Hz | 230V/50Hz | 230V/50Hz | - | - | - |
| Knives revolutions | r.p.m. 13.000 | r.p.m. 0÷13.000 | r.p.m. 2.000÷11.500 | - | - | - |
| Working capacity | lt 200 | lt 200 | lt 200 | - | - | - |
| A | mm 125 | mm 125 | mm 125 | ø mm 100 | ø mm 100 | mm |
| B | mm 190 | mm 190 | mm 190 | - | - | mm |
| C | mm 385 | mm 385 | mm 385 | mm 415 | mm 515 | mm |
| D | - | - | - | mm 350 | mm 450 | - |
| Net weight | kg 3,5 | kg 3,5 | kg 3,5 | kg 1,2 | kg 1,6 | kg |
| Shipping | mm 230x270x430 | mm 230x270x430 | mm 230x270x430 | mm 490x230x150 | mm 590x230x150 | mm |
| Gross weight | kg 3,7 | kg 3,7 | kg 3,7 | kg 1,8 | kg 2,1 | kg |